

S2632/2646/3246E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & robust
- Roll-out extension decks for extra reach
- Lightweight model for restricted floor loadings
- Ideal for construction & maintenance applications

 **snorkel**
www.snorkellifts.com

SLAB SCISSOR LIFTS

S2632E/2646E/3246E



DIMENSIONS	S2632E	S2646E	S3246E
Max. working height	32 ft	32 ft	38 ft
Max. platform height (A)	26 ft	26 ft	32 ft
Platform size (stowed)	91 in x 29 in	95 in x 44 in	95 in x 44 in
Platform size (extended)	10 ft 7 in x 29 in	10 ft 11 in x 29 in	10 ft 11 in x 29 in
Deck extension length (B)	36 in	36 in	36 in
Overall width (C)	32 in	46 in	46 in
Overall length (D)	93 in	96 in	96 in
Stowed height (E)	92 in	92 in	96 in
Min. height (guardrails folded)	75 in	75 in	79 in
Wheelbase	6 ft 3 in	6 ft 3 in	6 ft 3 in
Ground clearance (pothole raised)	4 in	4 in	4 in
Ground clearance (pothole lowered)	0.75 in	1 in	1 in

PERFORMANCE			
Platform capacity	500 lbs	1,000 lbs	700 lbs
Max. drive height	26 ft	26 ft	32 ft
Max. drive speed (elevated)	0.5 mph	0.5 mph	0.5 mph
Max. drive speed (stowed)	2.0 mph	2.0 mph	2.0 mph
Gradeability	25 %	25 %	25 %
Inside turning radius	10 in	10 in	10 in
Tires	15 in x 5 in non-marking solid rubber		
Controls	proportional	proportional	proportional
Drive system	2 wheel drive	2 wheel drive	2 wheel drive

POWER	
Power source	24V DC motor
Charger	25 amp, 110/240V AC, 50/60Hz

WEIGHT			
Weight	4,900 lbs	5,200 lbs	6,620 lbs

TURNING RADIUS

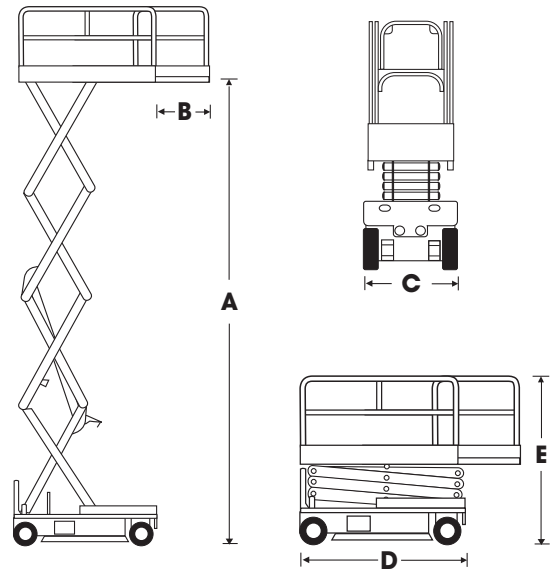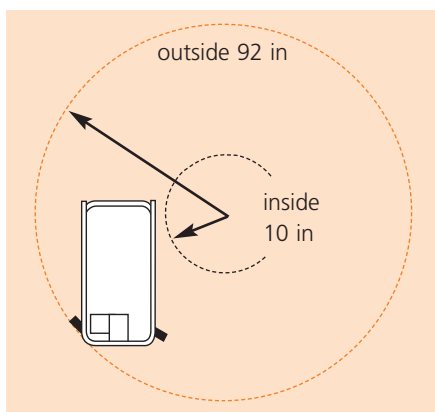

STANDARD FEATURES

- Proportional controls
- 36 in deck extension
- Tilt alarm
- Horn
- Swing-out service trays
- Power line to platform
- Hour meter
- ANSI compliant

OPTIONS

- Special paint colors
- Flashing amber light
- 110V AC 800w inverter generator
- Panel carrier
- BCI
- Key switch
- Swing gate
- Dual lanyard anchorage points
- Environmental green oil
- CSA compliant



www.snorkellifts.com

P.O. Box 1160
 St. Joseph, MO 64502-1160, USA
 Tel: 1 (785) 989-3000
 Toll-free: 1 (800) 255-0317
 Sales Fax: 1 (785) 989-3070
 Parts Fax: 1 (785) 989-3077